





## Dismantling tool / plug connector „NEW LINE“


Undo the plastic pipe in the screw connection by gently squeezing and rotating.

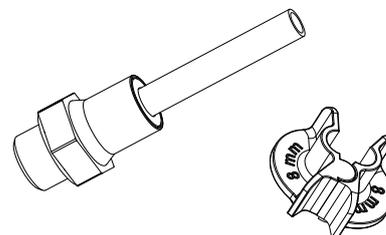


Position the dismantling tool over the plastic pipe with the slim side facing the screw connection. Close the dismantling tool. Press the dismantling tool into the screw connection.



Pull the pipe out of the screw connection using a rotating motion. Whilst doing this, the tool must remain held in the screw connection. Remove the tool.

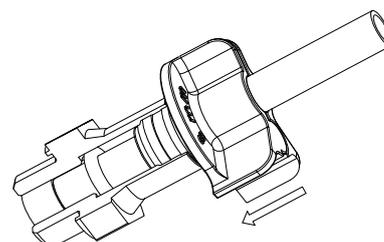

Slide the pipe into the screw connection. Check by pulling on the pipe (20-50 N), to make sure that the plastic pipe is firmly seated.

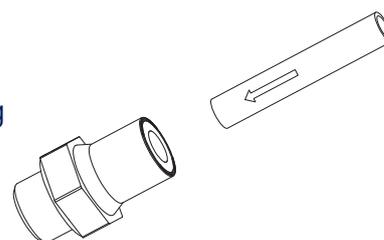

**The compressed air lines must be switched to without pressure before you unfasten the plastic pipe.**